



# Macintosh OS X - Dialup Connection

If you are using Macintosh OS 10.2 you may be able to use the Setup Assistant to setup your Dialup connection. [Click here for instructions.](#)

Click the Apple menu and choose **System Preferences**.

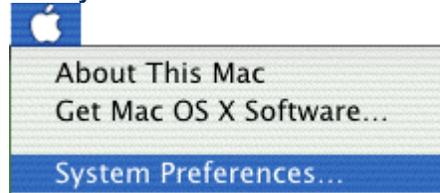


In the System Preferences window, click **Network**. Set the **Location** to **Automatic**, and **Show** to **Modem Port**.

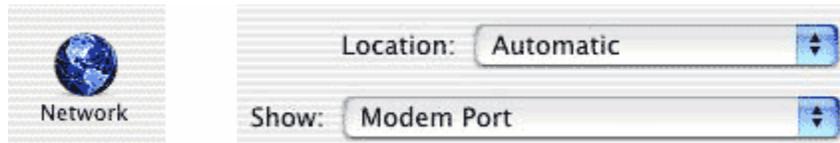

Click the **TCP/IP** tab.

- Choose to **Configure using PPP**
- Enter your DNS Numbers into the **Domain Name Servers** box.. Our numbers are 63.77.143.9 and 216.163.120.19

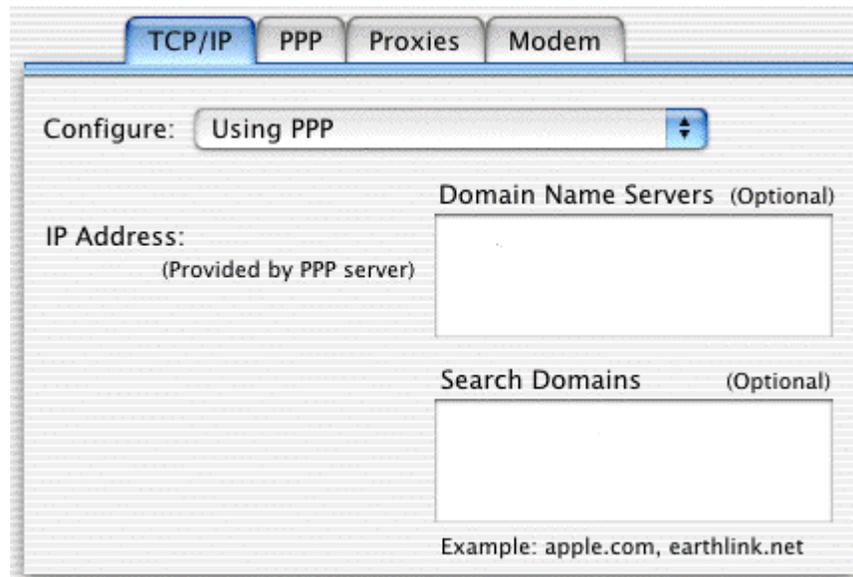

Click the **PPP** tab.

- Enter **LTIS** for the **Service Provider**.
- Type in your Local Access Number into the **Telephone Number** box. This is 685-5555.
- Enter your username into the **Account Name** box, and your password into the **Password** box. Your username should be lowercase with no spaces.

Click the **PPP Options** button. Check these two Session options, all other session options are your choice:

- **Connect automatically when starting TCP/IP applications**
- **Disconnect when user logs out**

The following **Advanced Options** should be checked:


- **Send PPP echo packets**
- **Use TCP header compression**

Click **OK**.

Click the **Proxies** tab. LTIS does not use proxy servers. These options should **NOT** be checked. Click the **Modem** tab. Choose your modem from the pop up menu. (If your modem came with your computer, it will most likely be listed as Apple Internal 56K Modem (v.90)).

- Turn the **Sound** to **On**.
- If your phone system uses Rotary (Pulse) dialing, change the option to Pulse.

- Put a check mark next to **Wait for dial tone before dialing**.

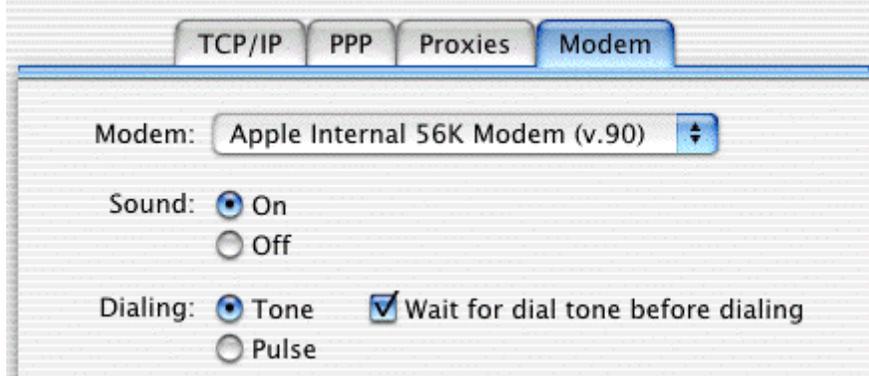

Click **Save**.